



LED COMMERCIAL DOWNLIGHT

*Unique design
with high lumens*



PRODUCT PRESENTATION | 2023

WWW.ASD-LIGHTING.COM



LED COMMERCIAL DOWNLIGHT



LED TRIMLESS DOWNLIGHT
page 4



LED DOWNLIGHT 1 INCH & 2 INCH
page 12




LED COMMERCIAL DOWNLIGHT
page 17

ACCESSORIES:



BATTERY BACK-UP KIT
page 23

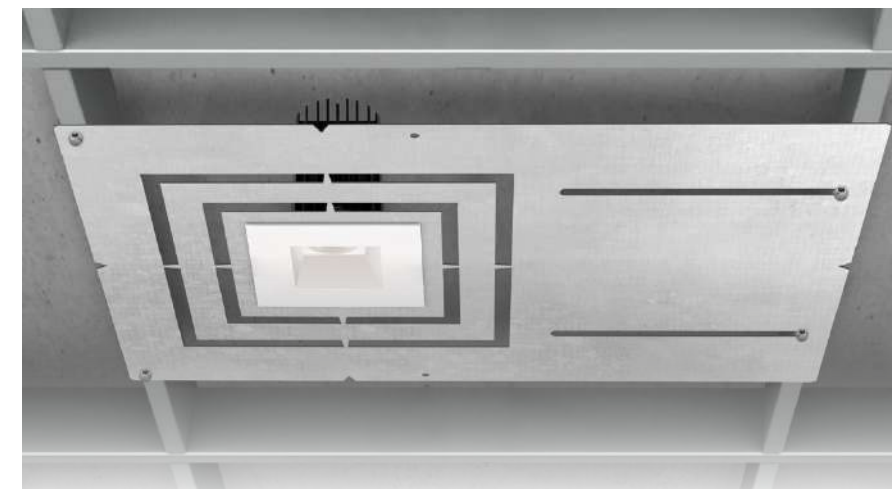

MOUNTING PLATES
page 24



*Unique design
with high lumens*

LED COMMERCIAL DOWNLIGHT

APPLICATION

LED DOWNLIGHT is perfect for retail, hospitality, commercial and certain residential settings. They are suitable for Wet locations, making them perfect for spaces with humidity requirements.

ENERGY SAVINGS & EFFICIENCY

With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation. They will save you a significant amount of money in their lifetime by providing high lumen output with low energy consumption.

CERTIFICATION & WARRANTY

ASD provides a 5-year warranty along with ETL, UL and ENERGY STAR certifications to guarantee top quality products and safety, while also allowing participation in rebates.

LED TRIMLESS DOWNLIGHT

The LED TRIMLESS DOWNLIGHT has a twist-lock design and includes a mud frame allowing it to be plastered over for a flush, smooth, trimless look.

BATTERY BACK-UP KIT

Battery Back-up ensures 90 minutes of power in case of emergency. The battery design allows for installation above the ceiling.

MOUNTING PLATES

Installation is quick and easy. Just adjust the mounting plate position and affix with screws or nails. Remove the metal template of the needed size and install the fixture.

5CCT SWITCH

Easy to set color temperature with a simple switch

HOUSING

Durable airtight die-cast aluminum body provides excellent heat dissipation

LEDS

Highly efficient LEDs provide high lumen output

LENS

Anti-glare PC lens

DRIVER

Energy-efficient dimmable LED driver provides stable light output, with economic power consumption

PLUG & TWIST CONNECTOR

Easy to connect the fixture and the driver with no wiring required

REFLECTOR

Multifaceted specular reflector with 38° beam angle

MUD FRAME

Trimless look



LED TRIMLESS DOWNLIGHT 2 INCH

CD-T 2"

The LED TRIMLESS DOWNLIGHT has a twist-lock design and includes a mud frame designed to be plastered over for a flush, smooth, trimless look.



PRODUCT SIZES

2"



AVAILABLE POWER

8W, 15W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

529-643lm, 830-1077lm



DURABLE AIRTIGHT ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION




5 COLOR TEMPERATURE OPTIONS



CRI90+ RICH AND NATURAL COLORS




IC RATED CANLESS SOLUTION

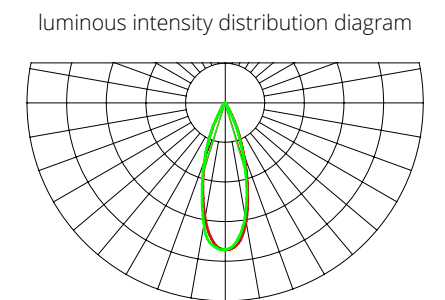

WHITE



BLACK



120-277V voltage




0-10V dimming



Wet locations



Battery Back-up



120V voltage



Triac dimming

LED TRIMLESS DOWNLIGHT 3.5 INCH

CD-T 3.5"

The LED TRIMLESS DOWNLIGHT has a twist-lock design and includes a mud frame designed to be plastered over for a flush, smooth, trimless look.



PRODUCT SIZES

3.5"



AVAILABLE POWER

12W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

751-953lm



DURABLE AIRTIGHT ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



5 COLOR TEMPERATURE OPTIONS




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

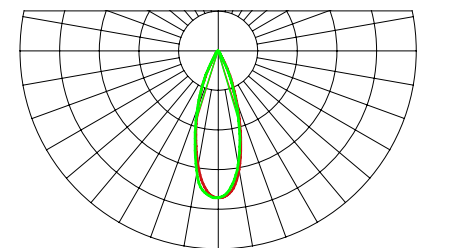

WHITE



BLACK



120V voltage



Triac dimming



Wet locations



Battery Back-up

LED TRIMLESS DOWNLIGHT 4 INCH



CD-T 4"

The LED TRIMLESS DOWNLIGHT has a twist-lock design and includes a mud frame designed to be plastered over for a flush, smooth, trimless look.



4"





15W



2700K, 3000K, 3500K, 4000K, 5000K



825-1090lm

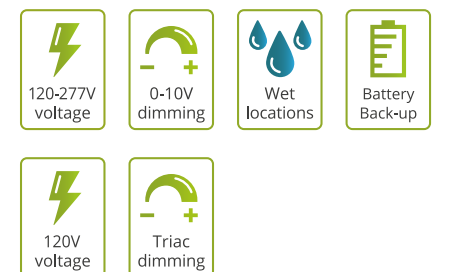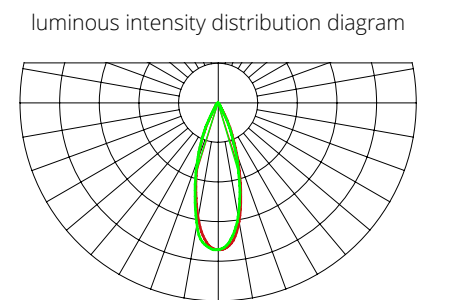

LED TRIMLESS DOWNLIGHT 6 INCH



CD-T 6"

The LED TRIMLESS DOWNLIGHT has a twist-lock design and includes a mud frame designed to be plastered over for a flush, smooth, trimless look.



PRODUCT SIZES

6"



AVAILABLE POWER

24W



2700K, 3000K, 3500K, 4000K, 5000K



1683-2075lm



DURABLE AIRTIGHT ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



5 COLOR TEMPERATURE OPTIONS





CRI90+ RICH AND NATURAL COLORS





IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

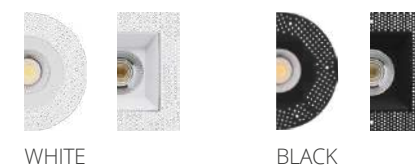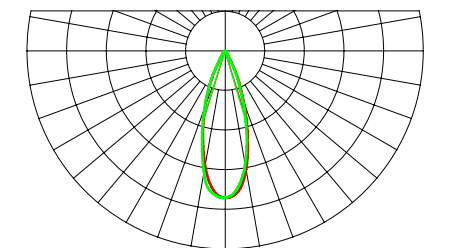

WHITE

BLACK



LED TRIMLESS DOWNLIGHT GIMBALL



CD-TG

The LED TRIMLESS DOWNLIGHT GIMBALL has a twist-lock design and includes a mud frame to be plastered over for a flush, smooth, trimless look.



PRODUCT SIZE

2", 3.5", 4"



AVAILABLE POWER

8W, 12W, 17W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

573-717lm, 828-1043lm, 1384-1623lm



SWIVEL LENS WITH 30° TILT FOR DIRECTIONAL LIGHT CONTROL



5 COLOR TEMPERATURE OPTIONS




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

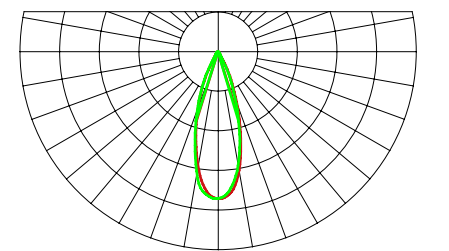

WHITE



BLACK



120V voltage



Triac dimming



Wet locations




Battery Back-up


LED TRIMLESS DOWNLIGHT COMBO GIMBAL




1-HEAD



2-HEADS



3-HEADS

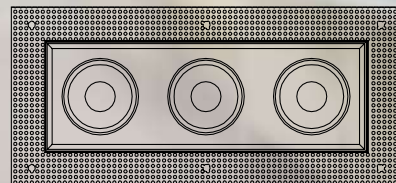

TCS

LED TRIMLESS COMBO DOWNLIGHT with multi-directional adjustable swivel heads produces a high light output with minimal glare as a result of its regressed light source. It includes a mud frame to be plastered over, giving it a smooth trimless look.



1-head, 2-heads, 3-heads




15W, 30W, 45W



2700K, 3000K, 3500K, 4000K, 5000K



1008-1234lm, 1720-2112lm, 2732-3308lm

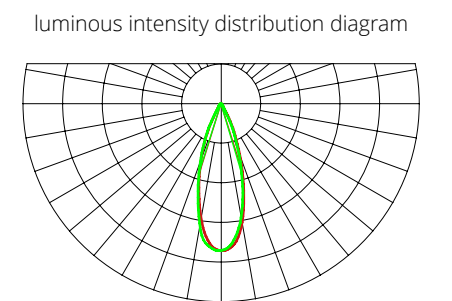

WHITE



LED DOWNLIGHT 1INCH & 2INCH

LED DOWNLIGHT 1INCH & 2INCH features a durable airtight aluminum body, multifaceted reflector with a 38° beam angle, and plastic anti-glare lens.

This product has round and square trim shape options for different projects.



BATTERY BACK-UP KIT

Battery Back-up ensures 90 minutes of power in case of emergency. The battery design allows for installation above the ceiling.

MOUNTING PLATES

Installation is quick and easy. Just adjust the mounting plate position and affix with screws or nails. Remove the metal template of the needed size and install the fixture.

5CCT SWITCH

Easy to set color temperature with a simple switch

DRIVER

Energy-efficient dimmable LED driver provides stable light output, with economic power consumption

PLUG & TWIST CONNECTOR

Easy to connect the fixture and the driver with no wiring required

HOUSING

Durable airtight die-cast aluminum body provides excellent heat dissipation

LEDS

Highly efficient LEDs provide high lumen output

LENS

Anti-glare PC lens

SPRING CLIPS

Two adjustable springs clips secure luminaire to ceiling

LED DOWNLIGHT 1 INCH



CD-P 1"

LED DOWNLIGHT 1 INCH features a durable airtight aluminum body, multifaceted reflector with a 38° beam angle, and plastic anti-glare lens.



PRODUCT SIZE

1"



AVAILABLE POWER

7W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

475-560lm



DURABLE AIRTIGHT ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



5 COLOR TEMPERATURE OPTIONS




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

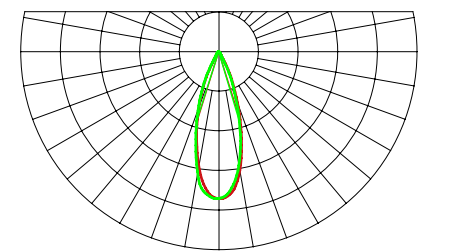

WHITE



BLACK



120V voltage



Triac dimming



Wet locations



Battery Back-up

LED DOWNLIGHT 2 INCH

CD-P 2"

LED DOWNLIGHT 2 INCH features a durable airtight aluminum body, multifaceted reflector with a 38° beam angle, and plastic anti-glare lens.



PRODUCT SIZE

2"



AVAILABLE POWER

8W, 15W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

504-649lm, 871-1110lm



DURABLE AIRTIGHT ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



5 COLOR TEMPERATURE OPTIONS




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

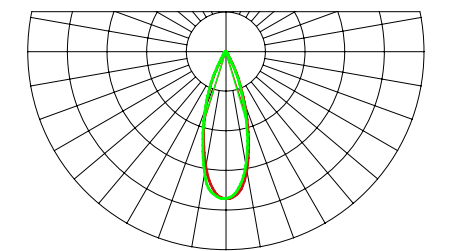

WHITE



BLACK



120-277V voltage



0-10V dimming



Wet locations



Battery Back-up



120V voltage



Triac dimming

LED DOWNLIGHT 2 INCH

CD-PWR with Wall Wash Trim

LED DOWNLIGHT 2 INCH with Wall Wash Trim letting you focus the light on the vertical surfaces such as walls.



**PRODUCT
SIZE**

2"



**AVAILABLE
POWER**

8W



**COLOR
SELECTABLE**

2700K, 3000K, 3500K,
4000K, 5000K



LUMEN

361-416lm



WALL WASH TRIM



**5 COLOR
TEMPERATURE OPTIONS**




**CRI90+
RICH AND NATURAL COLORS**



**IC RATED
CANLESS SOLUTION**

luminous intensity distribution diagram

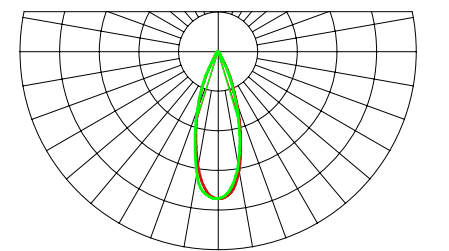

WHITE



120V
voltage



Triac
dimming



Wet
locations

LED COMMERCIAL DOWNLIGHT

The LED COMMERCIAL DOWNLIGHTS come in different sizes with a classic, low-profile design and a smooth trim.

They are equipped with a simple switch that can be used to adjust both the CCT and wattage. They are designed to operate on both residential and commercial circuits and are equipped with a dimmable 0-10V driver.



HIGH POWER MODELS


High Power options provide more light output, making them the perfect solution for high ceilings.

BATTERY BACK-UP KIT

Battery Back-up ensures 90 minutes of power in case of emergency. The battery design allows for installation above the ceiling.

5CCT SWITCH

Easy to set color temperature with a simple switch

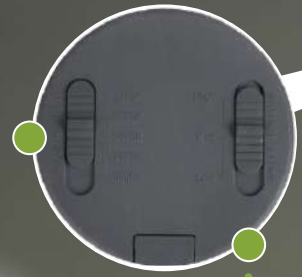

POWER ADJUSTABLE

Easy to set needed power with a simple switch




LEDS

Highly efficient LEDs provide high lumen output



DRIVER

Energy-efficient dimmable LED driver provides stable light output, with economic power consumption

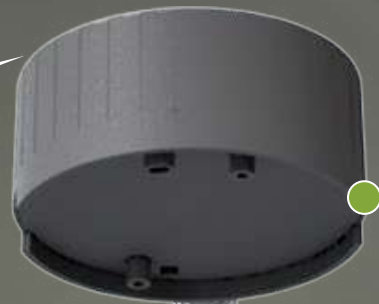

BRACKET WITH CLIPS

Two adjustable springs clips secure luminaire to ceiling



HOUSING

Durable airtight die-cast aluminum body provides excellent heat dissipation



LED COMMERCIAL DOWNLIGHT 4 INCH

CDL7 4"

The LED COMMERCIAL DOWNLIGHTS come in different sizes with a classic, low-profile design and a smooth trim. They are equipped with a simple switch that can be used to adjust both the CCT and wattage. They are designed to operate on both residential and commercial circuits and are equipped with a dimmable 0-10V driver.



PRODUCT SIZES

4"



POWER ADJUSTABLE

7-13W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

600-1050lm



DURABLE ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



COLOR AND POWER SELECTABLE




CRI90+ RICH AND NATURAL COLORS




IC RATED CANLESS SOLUTION

luminous intensity distribution diagram

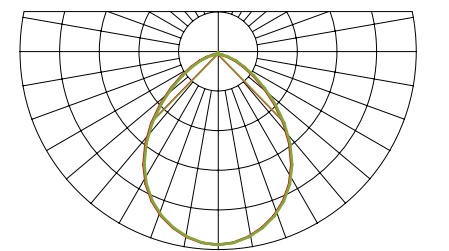

WHITE




120-277V voltage



0-10V dimming



Wet locations



Battery Back-up

LED COMMERCIAL DOWNLIGHT 6 INCH

CDL7 6"

The LED COMMERCIAL DOWNLIGHTS come in different sizes with a classic, low-profile design and a smooth trim. They are equipped with a simple switch that can be used to adjust both the CCT and wattage. They are designed to operate on both residential and commercial circuits and are equipped with a dimmable 0-10V driver.



PRODUCT SIZES

6"



POWER ADJUSTABLE

10-22W, 20-30W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

900-1850lm, 1830-2487lm



DURABLE ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



COLOR AND POWER SELECTABLE




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION


luminous intensity distribution diagram

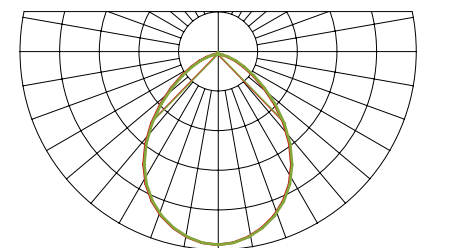

WHITE



BLACK




120-277V voltage



0-10V dimming



Wet locations



Battery Back-up

LED COMMERCIAL DOWNLIGHT 8 INCH

CDL7 8"

The LED COMMERCIAL DOWNLIGHTS come in different sizes with a classic, low-profile design and a smooth trim. They are equipped with a simple switch that can be used to adjust both the CCT and wattage. They are designed to operate on both residential and commercial circuits and are equipped with a dimmable 0-10V driver.



PRODUCT SIZES

8"



POWER ADJUSTABLE

12-30W, 30-40W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

1050-2400lm, 2603-3250lm



DURABLE ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



COLOR AND POWER SELECTABLE




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION


luminous intensity distribution diagram

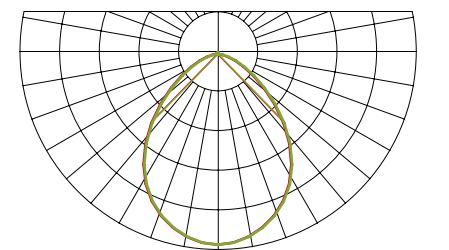

WHITE



BLACK




120-277V voltage



0-10V dimming



Wet locations



Battery Back-up



LED COMMERCIAL DOWNLIGHT 10 INCH

CDL7 10"

The LED COMMERCIAL DOWNLIGHTS come in different sizes with a classic, low-profile design and a smooth trim. They are equipped with a simple switch that can be used to adjust both the CCT and wattage. They are designed to operate on both residential and commercial circuits and are equipped with a dimmable 0-10V driver.



PRODUCT SIZES

10"



POWER ADJUSTABLE

20-40W, 40-60W



COLOR SELECTABLE

2700K, 3000K, 3500K, 4000K, 5000K



LUMEN

1800-3000lm, 3477-4903lm



DURABLE ALUMINUM HOUSING WITH EXCELLENT HEAT DISSIPATION



COLOR AND POWER SELECTABLE




CRI90+ RICH AND NATURAL COLORS



IC RATED CANLESS SOLUTION


luminous intensity distribution diagram

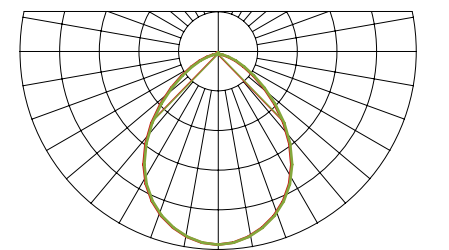

WHITE



BLACK




120-277V voltage



0-10V dimming



Wet locations



Battery Back-up





BATTERY BACK-UP KIT

Battery back-up ensures 90 minutes of power in case of emergency. Battery design allows to install it above the ceiling. It comes in 8W and 15W versions.

Compatible models include: CD-P, CD-C, CD-T, CDL7


 AUTOMATIC SELF-CHECKING OPTION

 FIELD INSTALLATION

 PROTECTION: OVER-TEMPERATURE, OVER-CHARGE, OVER-DISCHARGE, SHORT-CIRCUIT



BLD-HM08D

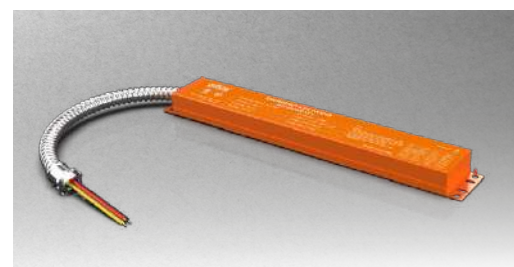

BLD-HM15D

MOUNTING PLATES

NEW CONSTRUCTION MOUNTING PLATE is a universal and handy solution for new construction.

Installation is quick and easy. Just adjust the mounting plate position and secure it with screws or nails. Remove the metal template of the needed size and install the fixture.



NEW CONSTRUCTION MOUNTING PLATE
WITH HOLES AND SLIDING CLIPS



NEW CONSTRUCTION FLAT MOUNTING PLATE
WITH A SYMMETRIC HOLE



NEW CONSTRUCTION FLAT MOUNTING PLATE
WITH AN ASYMMETRIC HOLE



LED COMMERCIAL DOWNLIGHT



LED TRIMLESS DOWNLIGHT 2 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TR-2D8AC-WH	2"	Round	8W	120V	Triac	550/566/616/643/640lm	2700/3000/3500/4000/5000K		White	2-3/8" x 2-3/8" x 2-7/16"	18	ETL / Energy Star
ASD-CD-TS-2D8AC-WH	2"	Square	8W	120V	Triac	529/551/595/626/636lm	2700/3000/3500/4000/5000K		White	2-3/4" x 2-3/4" x 3-3/8"	18	ETL / Energy Star
ASD-CD-TR-2D15AC-BK	2"	Round	15W	120V	Triac	830/881/980/1029/1000lm	2700/3000/3500/4000/5000K		Black	3-9/16" x 3-9/16" x 5-1/16"	18	ETL / Energy Star
ASD-CD-TR-2D15AC-WH	2"	Round	15W	120V	Triac	830/881/980/1029/1000lm	2700/3000/3500/4000/5000K		White	3-9/16" x 3-9/16" x 5-1/16"	18	ETL / Energy Star
ASD-CD-TS-2D15AC-BK	2"	Square	15W	120V	Triac	840/902/987/1026/989lm	2700/3000/3500/4000/5000K		Black	4-1/8" x 4-1/8" x 5-9/16"	18	ETL / Energy Star
ASD-CD-TS-2D15AC-WH	2"	Square	15W	120V	Triac	840/902/987/1026/989lm	2700/3000/3500/4000/5000K		White	4-1/8" x 4-1/8" x 5-9/16"	18	ETL / Energy Star
ASD-CD-TR-MV-2D15AC-WH	2"	Round	15W	120-277V	0-10V	914/956/1042/1077/1032lm	2700/3000/3500/4000/5000K		White	2-3/8" x 2-3/8" x 4-15/16"	18	ETL / Energy Star



LED TRIMLESS DOWNLIGHT 3.5 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TR-3D12AC-BK	3.5"	Round	12W	120V	Triac	751/796/880/933/925lm	2700/3000/3500/4000/5000K		Black	5-7/8" x 5-7/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-TR-3D12AC-WH	3.5"	Round	12W	120V	Triac	751/796/880/933/925lm	2700/3000/3500/4000/5000K		White	5-7/8" x 5-7/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-TS-3D12AC-BK	3.5"	Square	12W	120V	Triac	798/823/901/953/944lm	2700/3000/3500/4000/5000K		Black	5-11/16" x 5-11/16" x 3-1/16"	18	ETL
ASD-CD-TS-3D12AC-WH	3.5"	Square	12W	120V	Triac	798/823/901/953/944lm	2700/3000/3500/4000/5000K		White	5-11/16" x 5-11/16" x 3-1/16"	18	ETL



LED TRIMLESS DOWNLIGHT 4 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TR-4D15AC-BK	4"	Round	15W	120V	Triac	825/956/1011/1050/1055lm	2700/3000/3500/4000/5000K		Black	5-7/8" x 5-7/8" x 3-1/8"	18	ETL / Energy Star
ASD-CD-TR-4D15AC-WH	4"	Round	15W	120V	Triac	825/956/1011/1050/1055lm	2700/3000/3500/4000/5000K		White	5-7/8" x 5-7/8" x 3-1/8"	18	ETL / Energy Star
ASD-CD-TS-4D15AC-BK	4"	Square	15W	120V	Triac	871/928/1027/1090/1054lm	2700/3000/3500/4000/5000K		Black	6-5/16" x 6-5/16" x 4"	18	ETL / Energy Star
ASD-CD-TS-4D15AC-WH	4"	Square	15W	120V	Triac	871/928/1027/1090/1054lm	2700/3000/3500/4000/5000K		White	6-5/16" x 6-5/16" x 4"	18	ETL / Energy Star
ASD-CD-TR-MV-4D15AC-WH	4"	Round	15W	120-277V	0-10V	885/938/1034/1082/1041lm	2700/3000/3500/4000/5000K		White	3-1/8" x 3-1/8" x 2-13/16"	18	ETL / Energy Star



LED TRIMLESS DOWNLIGHT 6 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TR-6D24AC-BK	6"	Round	24W	120V	Triac	1691/1841/2001/2075/2051lm	2700/3000/3500/4000/5000K		Black	8-11/16" x 8-11/16" x 3-9/16"	12	ETL / Energy Star
ASD-CD-TR-6D24AC-WH	6"	Round	24W	120V	Triac	1691/1841/2001/2075/2051lm	2700/3000/3500/4000/5000K		White	8-11/16" x 8-11/16" x 3-9/16"	12	ETL / Energy Star
ASD-CD-TS-6D24AC-BK	6"	Square	24W	120V	Triac	1737/1800/1981/2038/2015lm	2700/3000/3500/4000/5000K		Black	8-1/8" x 8-1/8" x 3-11/16"	12	ETL
ASD-CD-TS-6D24AC-WH	6"	Square	24W	120V	Triac	1737/1800/1981/2038/2015lm	2700/3000/3500/4000/5000K		White	8-1/8" x 8-1/8" x 3-11/16"	12	ETL
ASD-CD-TR-MV-6D24AC-WH	6"	Round	24W	120-277V	0-10V	1683/1786/1960/2023/2009lm	2700/3000/3500/4000/5000K		White	5-5/16" x 5-5/16" x 3-5/8"	12	ETL / Energy Star



LED TRIMLESS DOWNLIGHT GIMBALL

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-TG-2D8AC-WH	2"	Round	8W	120V	Triac	622/645/692/713/717lm	2700/3000/3500/4000/5000K		White	2-3/4" x 2-3/4" x 2-3/8"	18	ETL / Energy Star
ASD-CD-TGR-2D8AC-BK	2"	Round	8W	120V	Triac	622/645/692/713/717lm	2700/3000/3500/4000/5000K		Black	2-3/4" x 2-3/4" x 2-11/16"	18	ETL
ASD-CD-TGS-2D8AC-BK	2"	Square	8W	120V	Triac	573/605/661/672/671lm	2700/3000/3500/4000/5000K		Black	3-1/16" x 3-1/16" x 2-3/4"	18	ETL
ASD-CD-TGS-2D8AC-WH	2"	Square	8W	120V	Triac	573/605/661/672/671lm	2700/3000/3500/4000/5000K		White	3-1/16" x 3-1/16" x 2-3/4"	18	ETL
ASD-CD-TGR-3D12AC-WH	3.5"	Round	12W	120V	Triac	828/920/1013/1031/1043lm	2700/3000/3500/4000/5000K		White	4-1/16" x 4-1/16" x 5-9/16"	18	ETL
ASD-CD-TGR-4D17AC-WH	4"	Round	17W	120V	Triac	1384/1452/1547/1599/1623lm	2700/3000/3500/4000/5000K		White	6-11/16" x 6-11/16" x 4"	18	ETL



LED TRIMLESS DOWNLIGHT COMBO GIMBAL

Model	Head q-ty	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Dimmable	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-TCS-1D15WH	1-head	Square	15W	120V	Triac	1008/1071/1191/1234/1203lm	2700/3000/3500/4000/5000K		White	6-3/8" x 6-3/8" x 3-1/8"	18	ETL
ASD-TCS-2D30WH	2-heads	Square	30W	120V	Triac	1720/1831/2040/2112/2043lm	2700/3000/3500/4000/5000K		White	10-1/8" x 6-3/8" x 3-1/8"	8	ETL
ASD-TCS-3D45WH	3-heads	Square	45W	120V	Triac	2732/2910/3200/3308/3215lm	2700/3000/3500/4000/5000K		White	13-15/16" x 6-3/8" x 3-1/8"	8	ETL





LED COMMERCIAL DOWNLIGHT



LED DOWNLIGHT 1 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-PR-1D7AC-BK	1"	Round	7W	120V	Triac	486/516/542/550/533lm	2700/3000/3500/4000/5000K	Black	2-3/8" x 2-3/8" x 3-3/8"	24	ETL
ASD-CD-PR-1D7AC-WH	1"	Round	7W	120V	Triac	486/516/542/550/533lm	2700/3000/3500/4000/5000K	White	2-3/8" x 2-3/8" x 3-3/8"	24	ETL
ASD-CD-PS-1D7AC-BK	1"	Square	7W	120V	Triac	475/531/551/560/541lm	2700/3000/3500/4000/5000K	Black	2-3/8" x 2-3/8" x 3-3/8"	24	ETL
ASD-CD-PS-1D7AC-WH	1"	Square	7W	120V	Triac	475/531/551/560/541lm	2700/3000/3500/4000/5000K	White	2-3/8" x 2-3/8" x 3-3/8"	24	ETL

LED DOWNLIGHT 2 INCH

Model	Size	Type	Watts	Input Voltage	Dimmable	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CD-PR-2D8AC-BK	2"	Round	8W	120V	Triac	526/561/615/645/649lm	2700/3000/3500/4000/5000K	Black	3-1/8" x 3-1/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-PR-2D8AC-WH	2"	Round	8W	120V	Triac	526/561/615/645/649lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-PS-2D8AC-BK	2"	Square	8W	120V	Triac	504/534/584/612/615lm	2700/3000/3500/4000/5000K	Black	3-1/8" x 3-1/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-PS-2D8AC-WH	2"	Square	8W	120V	Triac	504/534/584/612/615lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 2-15/16"	18	ETL / Energy Star
ASD-CD-PR-2D15AC-BK	2"	Round	15W	120V	Triac	916/978/1078/1110/1023lm	2700/3000/3500/4000/5000K	Black	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PR-2D15AC-WH	2"	Round	15W	120V	Triac	916/978/1078/1110/1023lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PS-2D15AC-BK	2"	Square	15W	120V	Triac	871/923/1015/1103/987lm	2700/3000/3500/4000/5000K	Black	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PS-2D15AC-WH	2"	Square	15W	120V	Triac	871/923/1015/1103/987lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star
ASD-CD-PR-MV-2D15AC-WH	2"	Round	15W	120-277V	0-10V	1071/1087/1042/1081/1041lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 4-15/16"	18	ETL / Energy Star

LED DOWNLIGHT 2 INCH with ROUND WALL WASH TRIM

Model	Size	Watts	Input Voltage	Dimmable	Lm	CCT	Finish	Dimensions LxWxH	Type	Pcs. per Carton	Certification
ASD-CD-PWR-2D8AC-WH	2"	8W	120V	Triac	361/375/401/416/415lm	2700/3000/3500/4000/5000K	White	3-1/8" x 3-1/8" x 2-13/16"	Round	18	ETL / Energy Star

LED COMMERCIAL DOWNLIGHT 4 INCH

Model	Size	Watts	Input Voltage	Dimming	IC Rated	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CDL7-4DA13AC	4"	7/10/13W	120-277V	0-10V	Yes	600/850/1050lm	2700/3000/3500/4000/5000K	White	5-3/8" x 5-3/8" x 3-1/16"	8	UL / Energy Star

LED COMMERCIAL DOWNLIGHT 6 INCH

Model	Size	Watts	Input Voltage	Dimming	IC Rated	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CDL7-6DA22AC	6"	10/15/22W	120-277V	0-10V	Yes	900/1300/1850lm	2700/3000/3500/4000/5000K	White	8-1/4" x 8-1/4" x 4"	8	UL / Energy Star
ASD-CDL7-6DA22AC-BK	6"	10/15/22W	120-277V	0-10V	Yes	900/1300/1850lm	2700/3000/3500/4000/5000K	Black	8-1/4" x 8-1/4" x 4"	8	UL / Energy Star
ASD-CDL7-6DA30AC	6"	20/25/30W	120-277V	0-10V	No	1830/2161/2487lm	2700/3000/3500/4000/5000K	White	8-1/4" x 8-1/4" x 4"	8	UL

LED COMMERCIAL DOWNLIGHT 8 INCH

Model	Size	Watts	Input Voltage	Dimming	IC Rated	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CDL7-8DA30AC	8"	12/20/30W	120-277V	0-10V	Yes	1050/1700/2400lm	2700/3000/3500/4000/5000K	White	10-1/4" x 10-1/4" x 4-7/16"	4	UL / Energy Star
ASD-CDL7-8DA30AC-BK	8"	12/20/30W	120-277V	0-10V	Yes	1050/1700/2400lm	2700/3000/3500/4000/5000K	Black	10-1/4" x 10-1/4" x 4-7/16"	4	UL / Energy Star
ASD-CDL7-8DA40AC	8"	30/35/40W	120-277V	0-10V	No	2603/2981/3250lm	2700/3000/3500/4000/5000K	White	10-1/4" x 10-1/4" x 4-7/16"	4	UL

LED COMMERCIAL DOWNLIGHT 10 INCH


Model	Size	Watts	Input Voltage	Dimming	IC Rated	Lm	CCT	Finish	Dimensions LxWxH	Pcs. per Carton	Certification
ASD-CDL7-10DA40AC	10"	20/30/40W	120-277V	0-10V	Yes	1800/2400/3000lm	2700/3000/3500/4000/5000K	White	11-5/16" x 11-5/16" x 4-15/16"	4	UL / Energy Star
ASD-CDL7-10DA40AC-BK	10"	20/30/40W	120-277V	0-10V	Yes	1800/2400/3000lm	2700/3000/3500/4000/5000K	Black	11-5/16" x 11-5/16" x 4-15/16"	4	UL / Energy Star
ASD-CDL7-10DA60AC	10"	40/50/60W	120-277V	0-10V	No	3477/4148/4903lm	2700/3000/3500/4000/5000K	White	11-5/16" x 11-5/16" x 4-15/16"	4	UL



LED COMMERCIAL DOWNLIGHT


BATTERY BACK-UP KIT

ACCESSORIES				
Model	Applicable Models	Watts	Dimensions LxWxH	Pcs. per Carton
BLD-HM08D	CDL7, CD-P, CD-C, CD-T	8W	10-7/16" x 1-15/16" x 15/16"	10
BLD-HM15D	CDL7, CD-P, CD-C, CD-T	15W	12-15/16" x 1-7/16" x 15/16"	10

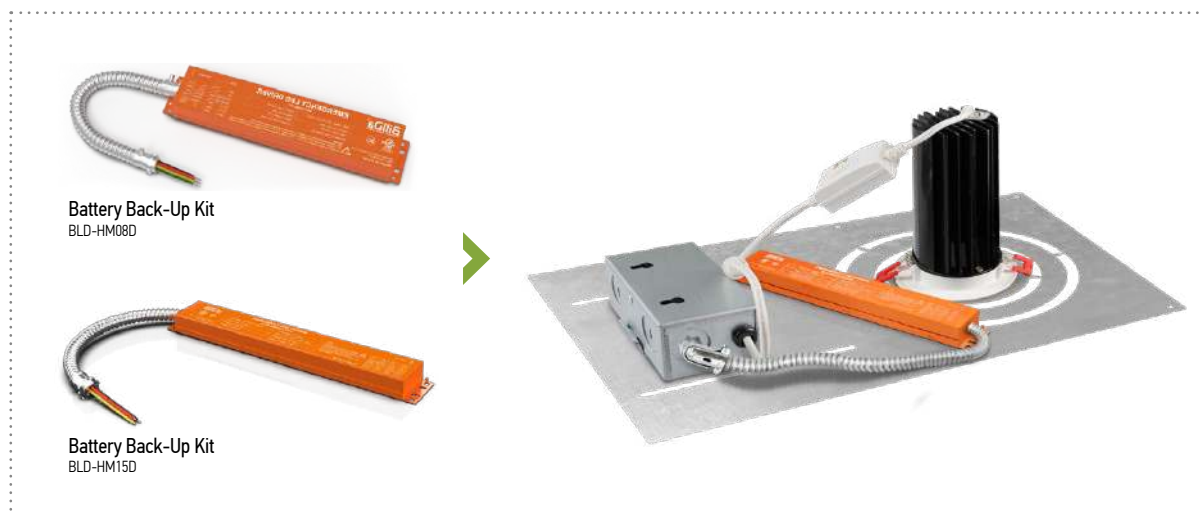

NEW CONSTRUCTION MOUNTING PLATE

ACCESSORIES					
Model	Holes	Description	Applicable Models	Dimensions DxH	Pcs. per Carton
ASD-MPLR-346-FS-6PACK	Round	With a Symmetric hole	CD-TR, CD-TGR, CD-PR, CD-CR	26" x 8-1/4" x 1/16"	4
ASD-MPLS-346-FS-6PACK	Square	With a Symmetric hole	CD-TS, CD-TGS, CD-PS	26" x 8-1/4" x 1/16"	4
ASD-MPLR-346-FA-6PACK	Round	With an Asymmetric hole	CD-TR, CD-TGR, CD-PR, CD-CR	13-1/4" x 9-1/16" x 1/16"	4
ASD-MPLR18-346-FA-6PACK	Round	With an Asymmetric hole	CD-TR, CD-TGR, CD-PR, CD-CR	18" x 9-1/16" x 1/16"	4
ASD-MPLS-346-FA-6PACK	Square	With an Asymmetric hole	CD-TS, CD-TGS, CD-PS	13-1/4" x 9-1/16" x 1/16"	4
ASD-MPLR-346-SC-6PACK	Round	With holes and Sliding Clips	CD-TR, CD-TGR, CD-PR, CD-CR	14-3/8" x 10-9/16" x 1-5/8"	2
ASD-MPLS-346-SC-6PACK	Square	With holes and Sliding Clips	CD-TS, CD-TGS, CD-PS	14-3/8" x 10-9/16" x 1-5/8"	2

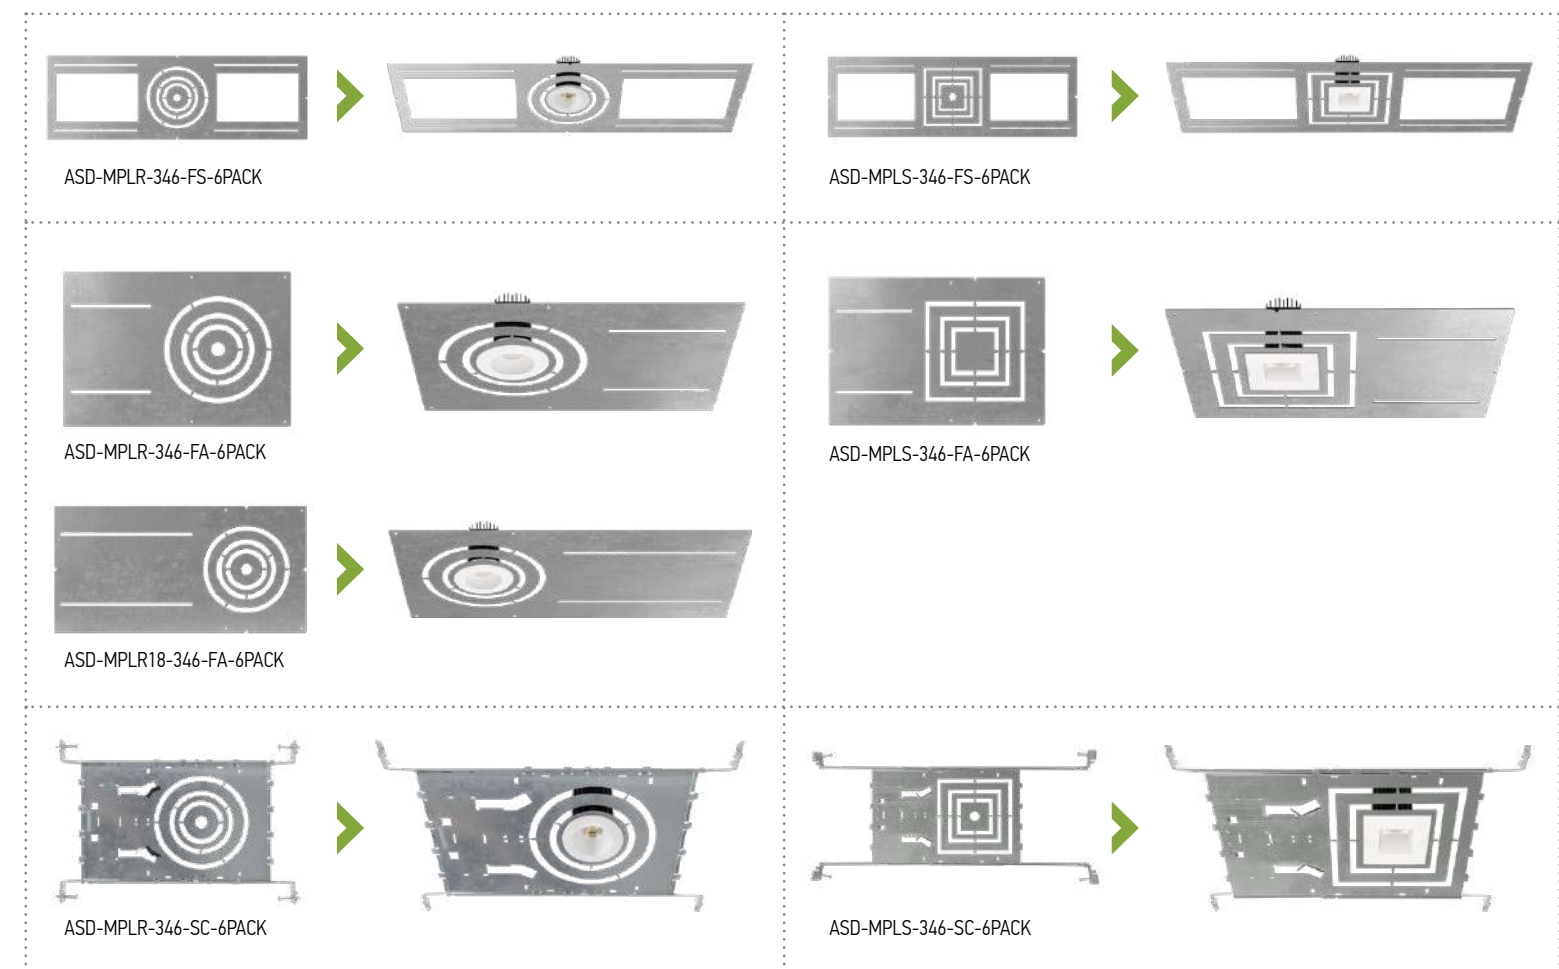



SINCE 1999

ASD LIGHTING CORP



ASD Lighting Corp has become one of the leading LED lighting brands in the United States for commercial and residential applications.

QUALITY

For the production of ASD Luminaires we carefully choose the highest quality components to ensure efficiency and longevity.



LOGISTICS

We are constantly improving our warehouse system so that delivery and storage of ASD products is not only profitable but fast and convenient.

